


OUTDOOR LIGHTING

FACADE

UP LIGHT


FRAN Series

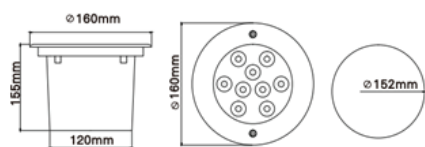

Versions by Light Colour



Distribution Curve

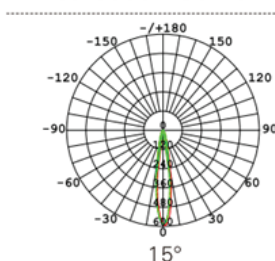

TECHNICAL DATA

Material:	Die-Cast Aluminum Housing with high corrosion resistance
Diffuser:	Tempered Glass
Mounting:	Inground Floor Mounted
Dimensions:	D160*H155mm

ELECTRICAL DATA

LED Chip:	Cree/Osram
Input Voltage:	AC110v/240V/24VDC
Working Temperature:	-30° C to 50° C
IP Rating:	IP67
Lifetime:	0.85

WARRANTY: 3 YEARS

APPLICATIONS:



OFFICE BUILDING



SHOPPING MALL



HOSPITALITY



AIRPORT

AVAILABLE MODELS :

Code	Voltage	Power	Color	LED QTY's	Beam Angle
FR-18-00*	AC220V	18*1W	3000K/4000K/6500K	18 pcs	8°/15°/25°/45°/60°
FR-24-00*	AC220V	24*1W	3000K/4000K/6500K	24 pcs	8°/15°/25°/45°/60°

Available in DC24C

Available in RGB