


OUTDOOR LIGHTING

FACADE

WALL WASHER

PIXEL Series

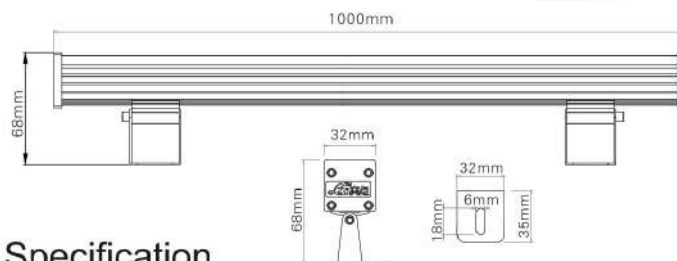

Specification

OPTICAL SPECS

Light Source:	Osram
Efficacy:	90lm/w
Cut :	— 2700-6000K
CRI:	>80 / >90 (Upon Request)
Beam Angle:	5°, 8°, 10°, 15°, 20°, 30°, 45°, 60°

ELECTRICAL SPECS

Power:	9-18w 12-24w 36w
Input Voltage:	24V DC
Power Frequency:	50-60Hz
Power Factor:	>0.9

MECHANICAL SPECS

Housing Material:	Extruded Aluminum with Diecast End caps
Diffuser:	Tempered Glass with PMMA Lens
Ingress Protection:	IP66
Impact Resistance:	IK08
Finish:	Aluminum

OTHER SPECS

Life Span:	50,000H(L80B10)
Operating Temperature:	-20 - +50C
Led Driver Spec:	Meanwell (IP67)
Led Spec:	COB
Dimming:	Triac/Dali / 0-10v(Optional)

APPLICATIONS:



OFFICE BUILDING



SHOPPING MALL



HOSPITALITY



AIRPORT

AVAILABLE MODELS :

Part No.	Power	Output Lumen	Color Temperature	Light Source	Driver	Dimensions
PI-09-00*	9W	630Lm	2700-6000K	Osram	External	L1000*32*68mm
PI-12-00*	12W	840Lm	2700-6000K	Osram	External	L1000*32*68mm
PI-18-00*	18W	1260Lm	2700-6000K	Osram	External	L1000*32*68mm
PI-24-00*	24W	1680Lm	2700-6000K	Osram	External	L1000*32*68mm
PI-36-00*	36W	2520Lm	2700-6000K	Osram	External	L1500*32*68mm