


## OUTDOOR LIGHTING

## FLOOD LIGHT

## Slim I Series

## Photometric Curve :

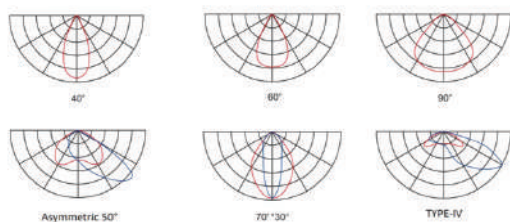

## OPTICAL SPECS

Light Source:	Cree/Osram
Size :	145-165lm/w
Cut :	2700-6500K
CRI:	2700-6000K

## ELECTRICAL SPECS

Power:	100-300W
Input Voltage:	220-240V DC
Power-Frequency:	50-60Hz
Power Factor:	>0.9

## MECHANICAL SPECS

Housing Material:	Die-Cast Aluminum
Diffuser:	Toughened Glass
Ingress Protection:	IP66
Impact Resistance:	IK09
Finish:	Black

## OTHER SPECS

Life Span:	50,000H(L80B10)
Operating Temperature:	-20 - +50
Led Driver Spec:	Philips/Meanwell
Led Spec:	SMD5050
Dimming:	Triac/Dali / 0-10v(Optional)



## APPLICATIONS:



OFFICE BUILDING



SHOPPING MALL



HOSPITALITY



AIRPORT

## AVAILABLE MODELS :

Part No.	Voltage	Power	CCT	LED Chip	Driver
SL-100-00*	AC220V	100W	2700-6000K	CREE/OSRAM	Philips/Meanwell
SL-200-00*	AC220V	200W	2700-6000K	CREE/OSRAM	Philips/Meanwell
SL-300-00*	AC220V	300W	2700-6000K	CREE/OSRAM	Philips/Meanwell