


OUTDOOR LIGHTING

FACADE RECESSED WALL WASHER

TECK Series

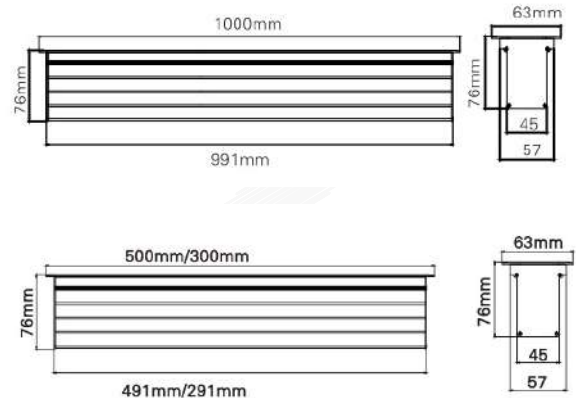

OPTICAL SPECS

Light Source:	Cree
Efficacy:	80lm/w
CCT :	2700-6000K
CRI:	>80 / >90 (Upon Request)
Beam Angle:	5°, 8°, 10°, 15°, 20°, 30°, 45°, 60°

ELECTRICAL SPECS

Power:	9-18w 12-24w 36w
Input Voltage:	220/240V AC
Power Frequency:	50-60Hz
Power Factor:	>0.9

MECHANICAL SPECS

Housing Material:	Extruded Aluminum with Diecast End caps
Diffuser:	Tempered Glass with PMMA Lens
Ingress Protection:	IP67
Impact Resistance:	IK08
Finish:	Aluminum

OTHER SPECS

Life Span:	50,000H(L80B10)
Operating Temperature:	-20 - +50C
Led Spec:	COB
Dimming:	Triac/Dali / 0-10v(Optional)

APPLICATIONS:



OFFICE BUILDING



SHOPPING MALL



HOSPITALITY



AIRPORT

AVAILABLE MODELS :

Part No.	Power	Output Lumen	Color Temperature	Light Source	Driver	Dimensions
TE-09-00*	9W	720Lm	2700-6000K	Cree	Built-in	L500*63*76mm
TE-12-00*	12W	960Lm	2700-6000K	Cree	Built-in	L500*63*76mm
TE-18-00*	18W	1440Lm	2700-6000K	Cree	Built-in	L1000*63*76mm
TE-24-00*	24W	1920Lm	2700-6000K	Cree	Built-in	L1000*63*76mm
TE-36-00*	36W	2880Lm	2700-6000K	Cree	Built-in	L1000*63*76mm