


## OUTDOOR LIGHTING

## FACADE

## WINDOW LIGHT

## WAY Series

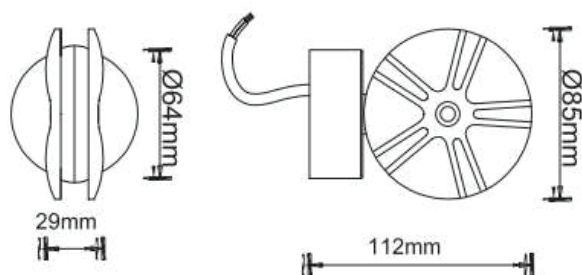

## OPTICAL SPECS

Light Source:	Cree
CCT:	2700-6000K
CRI:	>80/ >90 (Upon Request)
Beam Angle:	5x300°

## MECHANICAL SPECS

Housing Material:	Solid Passivated (Anodizing) Aluminum CNC machined
Diffuser:	Tempered Glass
Ingress Protection:	IP67
Impact Resistance:	IK08
Finish:	Grey /Black

## ELECTRICAL SPECS

Power:	5W
Input Voltage:	220 AC
Power Frequency:	50-60Hz
Power Factor:	>0.9

## OTHER SPECS

Life Span:	50000 H
Operating Temperature:	-20 - +50C
Led Driver Spec:	Internal (IP67)
Led Spec:	4 PCS CREE XPE LED
Dimming:	Dali / 0-10v(Optional)

## APPLICATIONS:



OFFICE BUILDING



SHOPPING MALL



HOSPITALITY



AIRPORT

## AVAILABLE MODELS :

Part No.	Power	Output Lumen	Color Temperature	Light Source	Driver	Dimensions
WA- 05-00**	5W	160Lm	2700-6000K	Cree	Built-in	D Ø85mm L112 mm